

iv iii ii i

چکیده

(DI)

% %

v (DI)

## *Investigation on Effect of Multiple Injection on Performance and Emission Reduction in a DI Diesel Engine*

F. Ommi; K. Poorghasemi; V. Esfahanian; A. Mirmohammadi

### **ABSTRACT**

Aim of this paper is to investigate mechanism of NO and soot reduction by using multiple injection as useful strategy for reducing DI diesel engines emissions. In this paper, we first studied the mechanism of NO and soot reduction by using double injection. Then after investigating different modes of injection, at last we introduce optimum mode of fuel injection for a DI diesel engine manufactured in our country. Experiments were induced at Motorsazan Tabriz to validate results of CFD simulation. Amount of fuel in each pulse and dwell time between injection pulses are essential parameters. Results showed that by using double injection soot and NO will reduce by 33% and 11% respectively.

**KEYWORDS :** DI diesel engine, multiple injections, KIVA-3V, Soot, NO.

/ / :

// :

F\_Ommi@yahoo.com

Poorghasemi\_Kamran@hotmail.com

evahid@ut.ac.ir

mirmohammadi.ali@gmail.com

i

ii

iii

iv

[ ]

CFD

MT-4.244

[ ]

[ ]

V

V

[ ]

[ ]

K-ε

(TAB)

(( ) )

$u_{rel}$

m

F

$$F_{spring} = k.x$$

$$F_{damping} = d.\dot{x}$$

( )

[ ]

: ( )

$$\ddot{x} = \frac{F}{m} - \frac{k}{m}x - \frac{d}{m}\dot{x}$$

( )

x


[ ]



$$t_d = \frac{2}{C_d} \frac{\rho_l r^2}{\mu_l} \quad (10)$$

$$\omega^2 = C_k \frac{\sigma}{\rho_d r^3} - \frac{1}{t_d^2} \quad (11)$$

$$\dot{y}_0 = (dy/dt)_{t=0}, y_0 = y_{t=0} \quad (12)$$

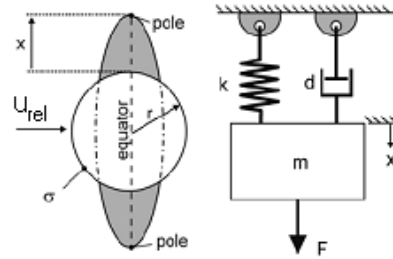

[ ] TAB : ( )

$\sigma$   $u_{rel}$   $r$   $We_g$   
 $\mu_l$   $t_d$   
 $We_g$

( ) ( )

$y \geq$  ,  $x \geq$  ,  $r$   
 $C_F = /$

$$\frac{d}{m} = C_d \frac{\mu_l}{\rho_l r^2} \quad (2)$$

$$\frac{k}{m} = C_k \frac{\sigma}{\rho_l r^3} \quad (3)$$

$$\frac{F}{m} = C_F \frac{\rho_g u_{rel}^2}{\rho_l r} \quad (4)$$

C ( )

$y_p$   $r$

MT-4.244

$$( ) \quad y = x / C_b r$$

( )

$$\ddot{y} = \frac{C_F \rho_g u_{rel}^2}{C_b \rho_l r^2} - C_k \frac{\sigma}{\rho_l r^3} y - C_d \frac{\mu_l}{\rho_l r^2} \dot{y} \quad (5)$$

$u_{rel}$

( )

bar

$$y(t) = \frac{C_F}{C_k C_b} We_g + \exp\left(-\frac{t}{t_d}\right) \quad (6)$$


$$\left[ A \cos \omega t + \frac{1}{\omega t_d} B \sin \omega t \right]$$

$$A = \left( y_0 - \frac{C_F}{C_k C_b} We_g \right) \quad (7)$$

$$B = \left( \dot{y} t_d + y_0 - \frac{C_F}{C_k C_b} We_g \right) \quad (8)$$

$$We_g = \frac{\rho u_{rel}^2 r}{\sigma} \quad (9)$$

$m^{-1}$  ,  $m^{-1}$  (k-value) , %  
 % Vol  
 HC , %  
 NOx ppm , ppm  
 O<sub>2</sub> ppm , ppm vol

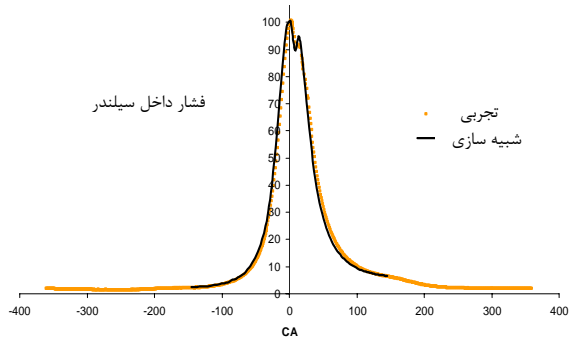

( ) :

( )

( ) :

(gr/kW.h)	(gr/kW.h)	
/	/	
/	/	

:


( ) % ( ) % ( )  
 ( )

$\lambda$  , ppm , ppm vol

( ) :

MT_4.244	
mm	
mm	
/ :	
ATDC	
bar	
rpm	
$\omega$	

( )






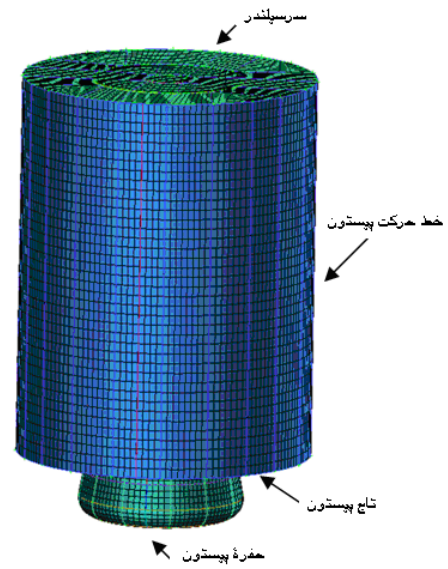


( ) :







( )



+ ) ( + )  
( )  
( )

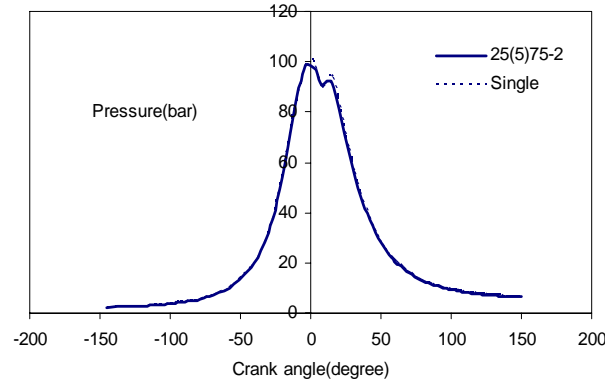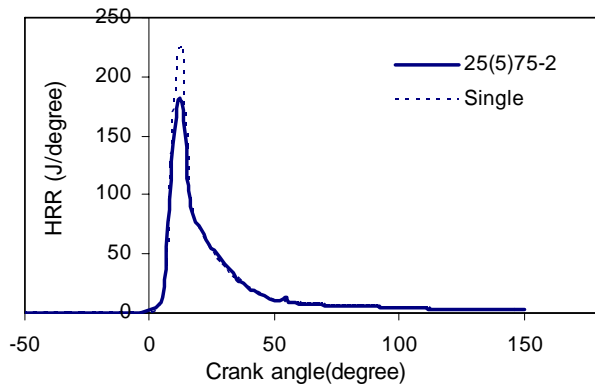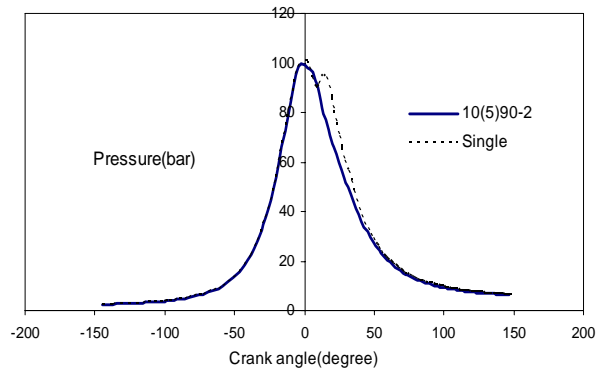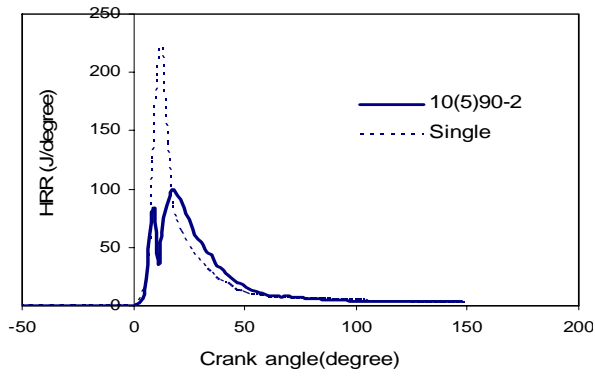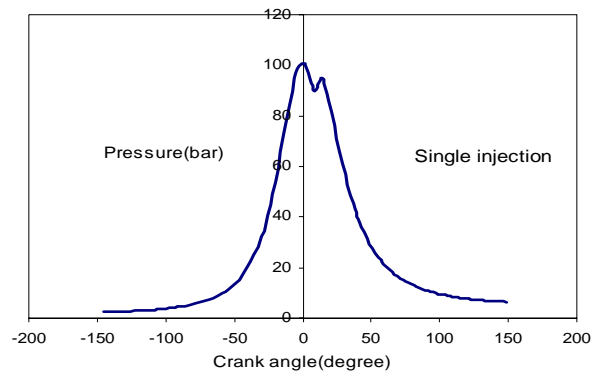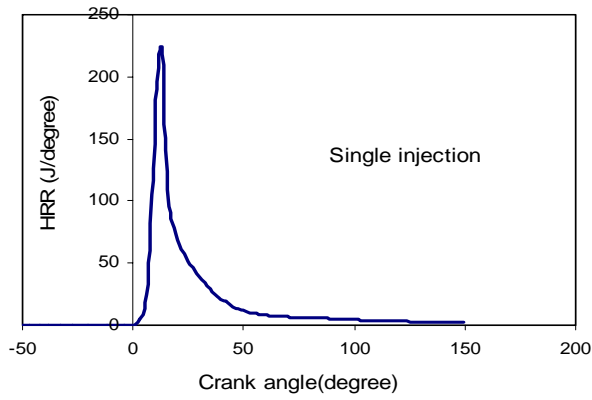

: ( )

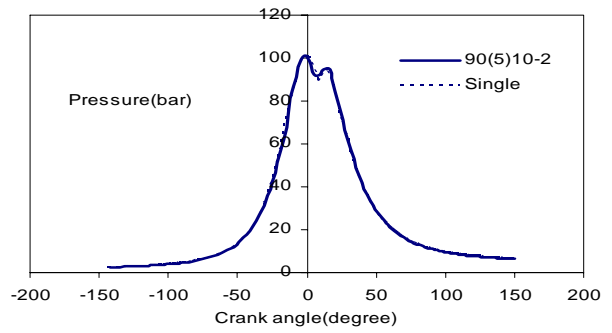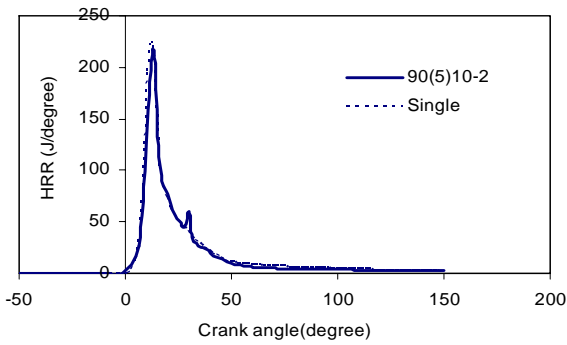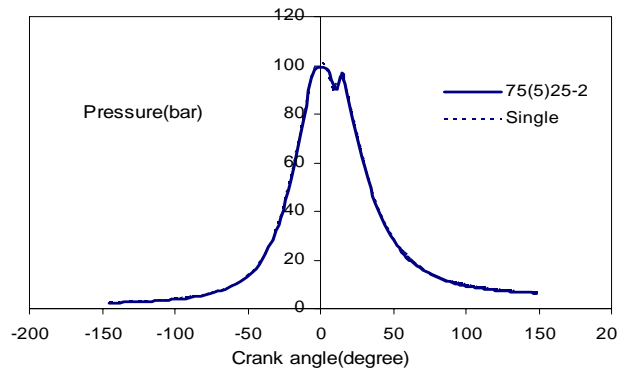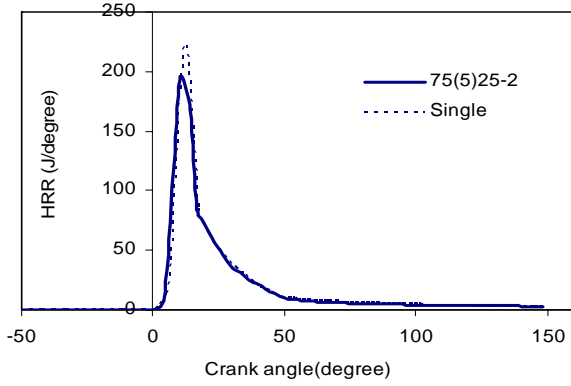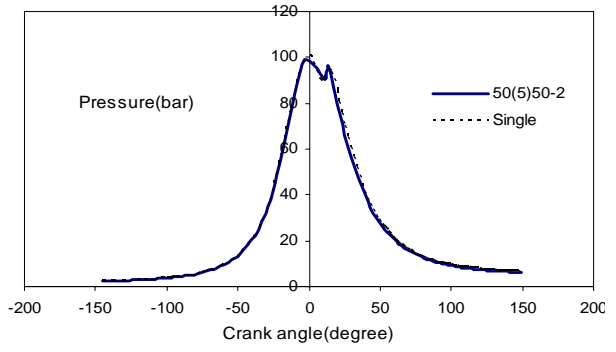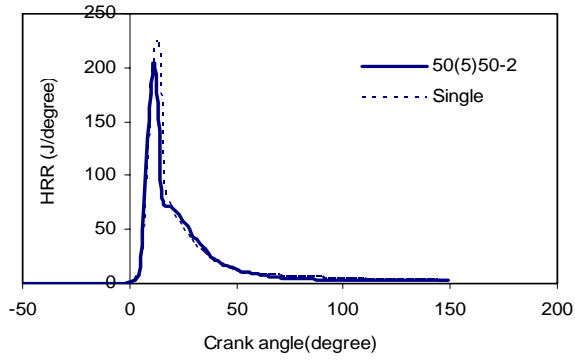

:( )

:( )

( )

( ) ( )


( )

( $\alpha$ )

( )


(g / kW. h)	(g / kW. h)	
/	/	
/	/	( )
/	/	( )
/	/	( )
/	/	( )



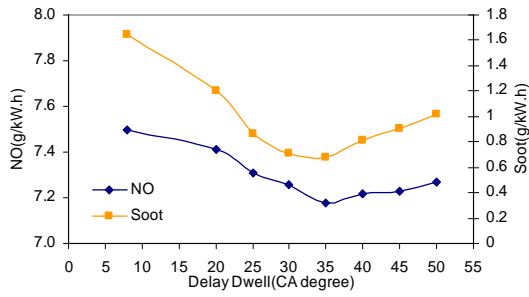

NO : ( )

% %

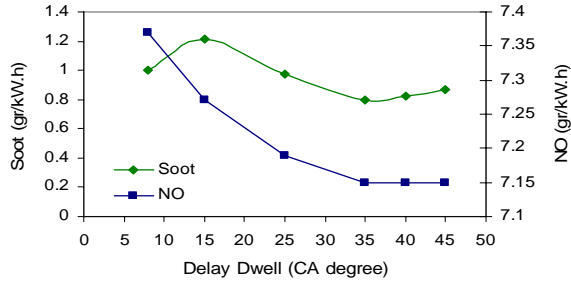

NO : ( )

% %

NO

( )



: ( )

دوده (%)	مونواکسید نیتروژن (%)	حالت‌های پاشش
۳۲/۸۵	۱۰/۸۷	۷۵ (۳۵) ۲۵-۲
۲۱/۵۶	۷/۶۸	۹۰ (۳۵) ۱۰-۲

(α)

( )

( )

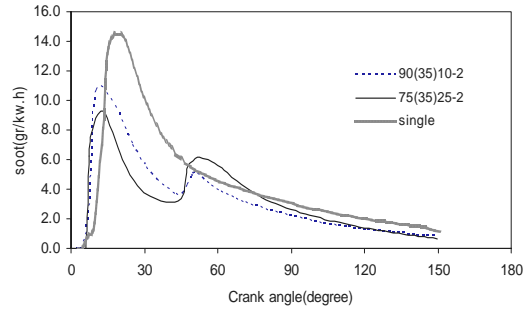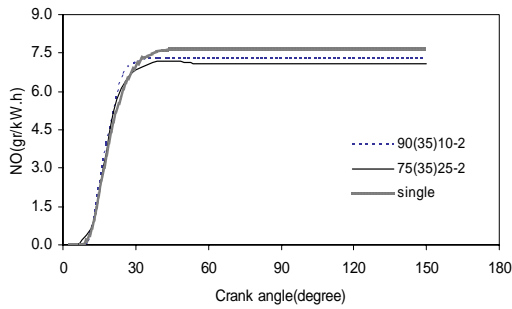

: ( )



( )

ATDC



( )

( )





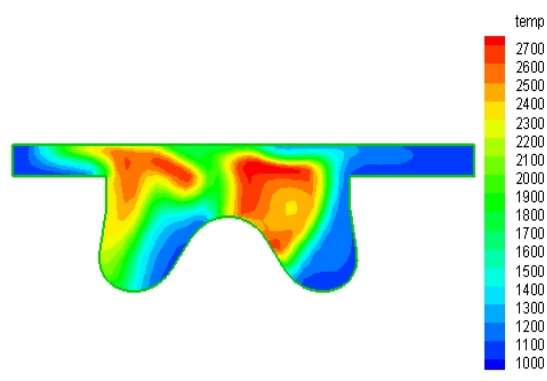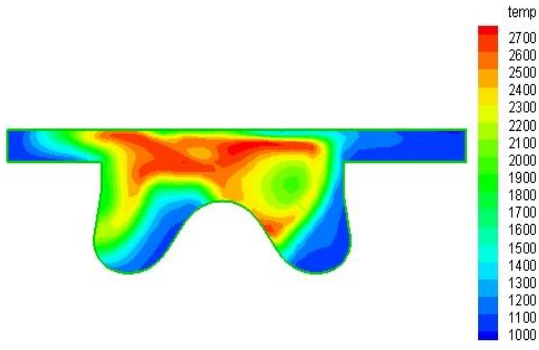

ATDC

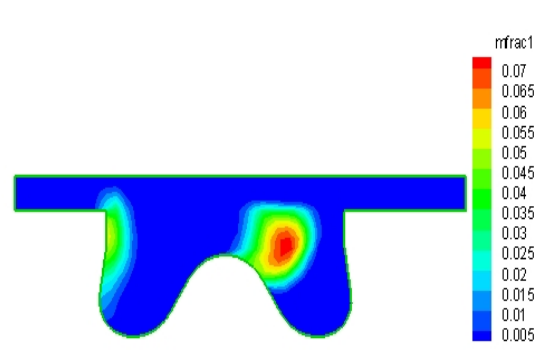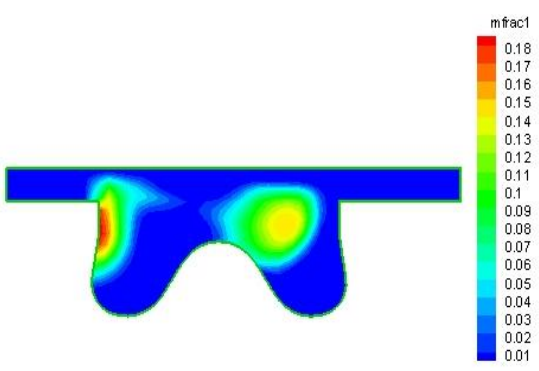

ATDC

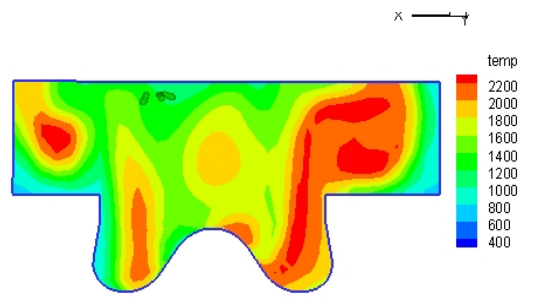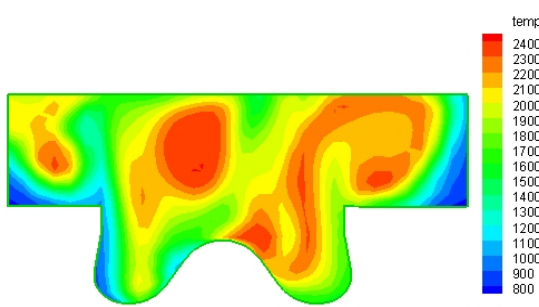


ATDC

(( ))



)

:( )





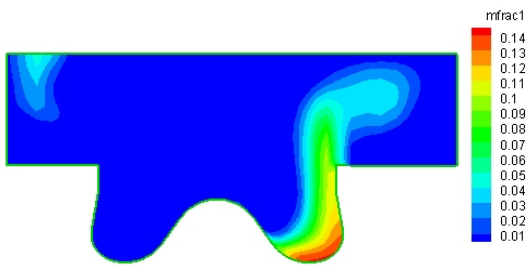


ATDC

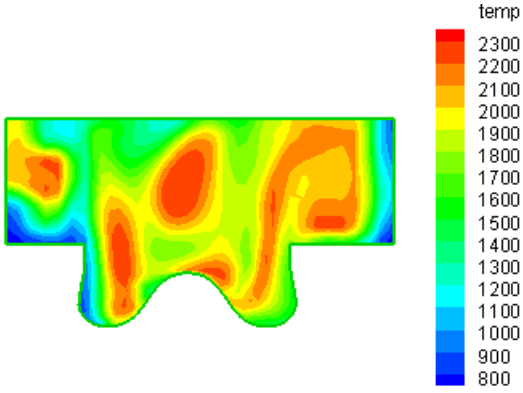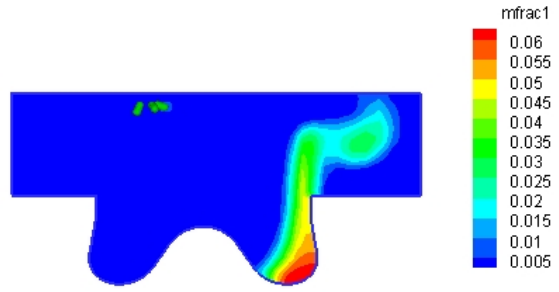

ATDC

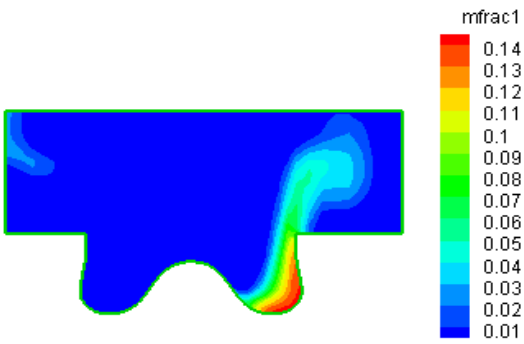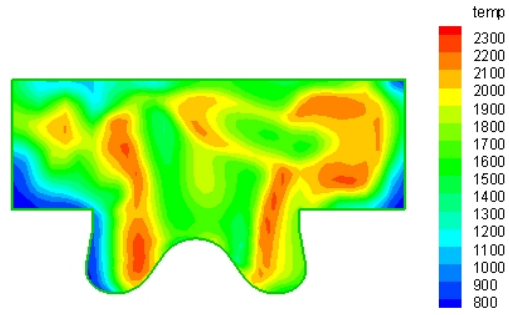

ATDC

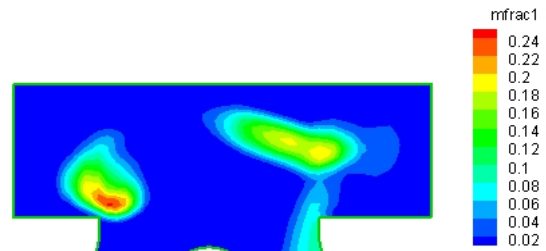

( ( )

)

:( )

:

V

- Ghafarpour, M. R., Noorpoor, A. R., "A Numerical study of Pilot or Split Rate Injection to Reduce Diesel engine Noise", Proc.IMEchE, Vol. 221, pp. 457-464, 2007. [ ]
- Liu, Y.; "Diesel Engine Modeling and Optimization for Emission Reduction", PhDs Thesis, University of Wisconsin- Madison, 2005. [ ]
- Mendez, S. and Thirouard, B.; "Using Multiple Injection Strategies in Diesel Combustion: Potential to Improve Emissions, Noise and Fuel Economy Trade-Off in Low CR Engines", SAE Technical Paper 2008-8-01- 1329, 2008. [ ]
- Amsden A.A; KIVA-II: A Computer Program for Chemically Reactive Flows with sprays, Los Alamos National Laboratory report, LA-11560-MS, 1989. [ ]
- O'Rourke P. J., Amsden, A.; "The TAB Method for Numerical Calculation of Spray Droplet Breakup", SAE Paper 872089, 1987. [ ]
- Heywood, J. B.; Internal Combustion Engine Fundamentals, 2<sup>nd</sup> edition McGraw-Hill, Inc., New York, 1998. [ ]
- Pierpont, D. A. and Reitz, R. D.; "Effect of injection Pressure and Nozzle Geometry on Emissions and Performance in a D.I Diesel", SAE Paper 950604, 1995. [ ]
- Nehmer, D. A. and Reitz, R. D.; "Measurement of the Effect of injection rate and Split Injections on Diesel Engine Soot and NOx Emissions", SAE Paper 940668, 1994. [ ]
- Lee, T.; "An Experimental Study of Emission Reduction Mechanisms in a High Speed Direct Injection Diesel Engine With Multiple Injection and EGR", PhDs Thesis, University of Wisconsin-Madison, 2002. [ ]
- Ricaud, J.C. and Lavoisier, F.; "Optimizing the Multiple Injection Settings on an HSDI Diesel Engine", THESEL 2002 Conference, 2002. [ ]
- Ayub, N. S. and Reitz, R.; "Multidimensional modeling of fuel effects and split injections on diesel engine cold- starting", J. Propulsion Power, Vol.13(1), pp. 123-130, 1997. [ ]

CFD	مکانیک سیالات محاسباتی	NO	مونواکسید نیتروژن
Simple	سیمپل	Soot	دوده
TDC	نقطه مرگ بالا	Multiple Injection	پاشش چند مرحله ای
ATDC	بعد از نقطه مرگ بالا	Common Rail	ریل مشترک
Direct injection	پاشش مستقیم	Pilot Injection	پیش پاشش سوخت
Kiva-3V Code	کد کیوا- ۳V	Split Injection	پاشش مجزا

